


Wide Mouth Skimmer Kit

Owner's Manual



GP91002W | GP91002G

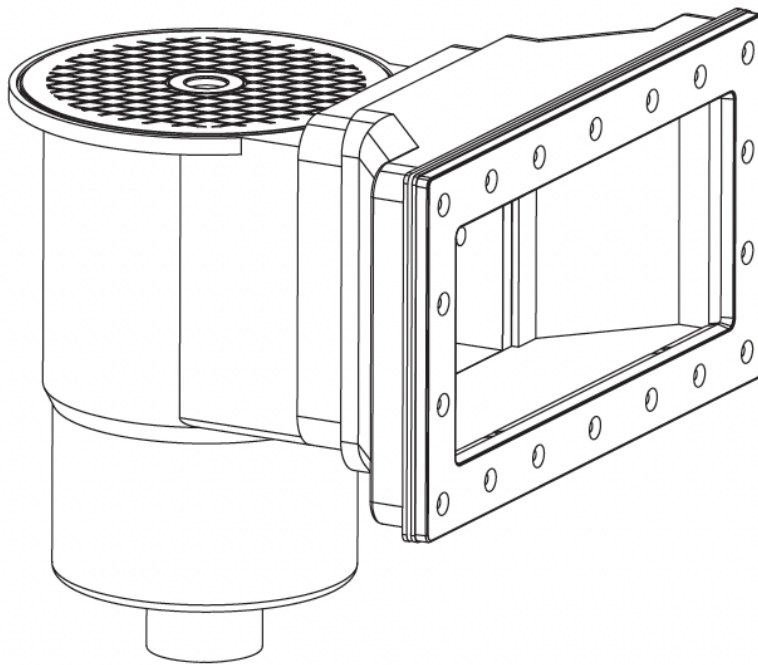

Scan to register your
product warranty

GoPool

Warranty registration

Thank you for choosing GoPool! Register your product today to activate your warranty and get quick, hassle-free support when you need it.



Scan to register your product warranty



WARNING


This equipment must be installed and serviced according to the information found in this manual. Improper installation can create hazards which could result in property damage, serious injury or death. Improper installation will void the warranty.

Table of contents


Installation.....1

Structure & Parts4

01. Remove the skimmer and its accessories from the box.
02. Make sure the holes size and position on the pool wall are matching skimmer requirements.

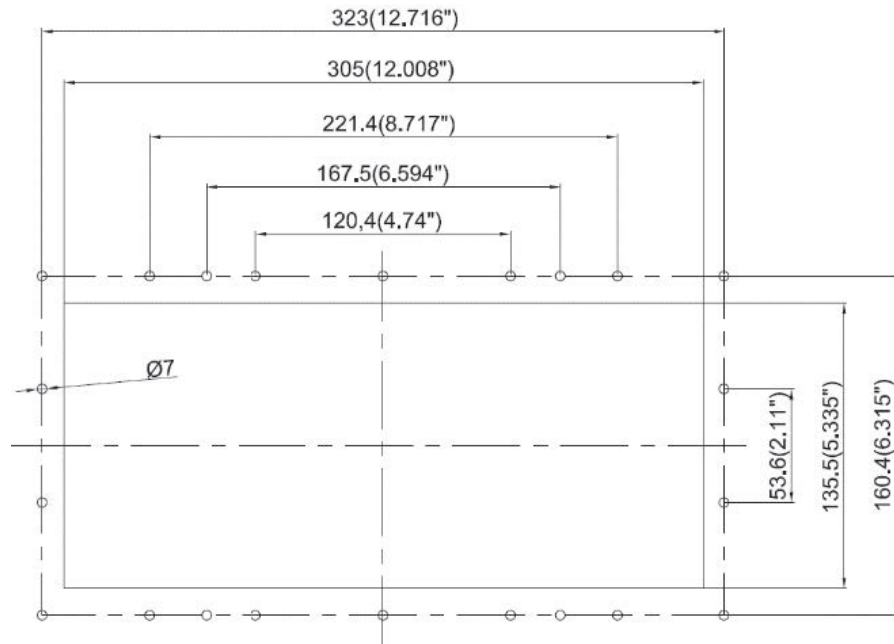


03. First place a single-layer square gasket into the small end groove of the skimmer holder, then put on the skimmer body and finally tighten with 8 pan head screws.

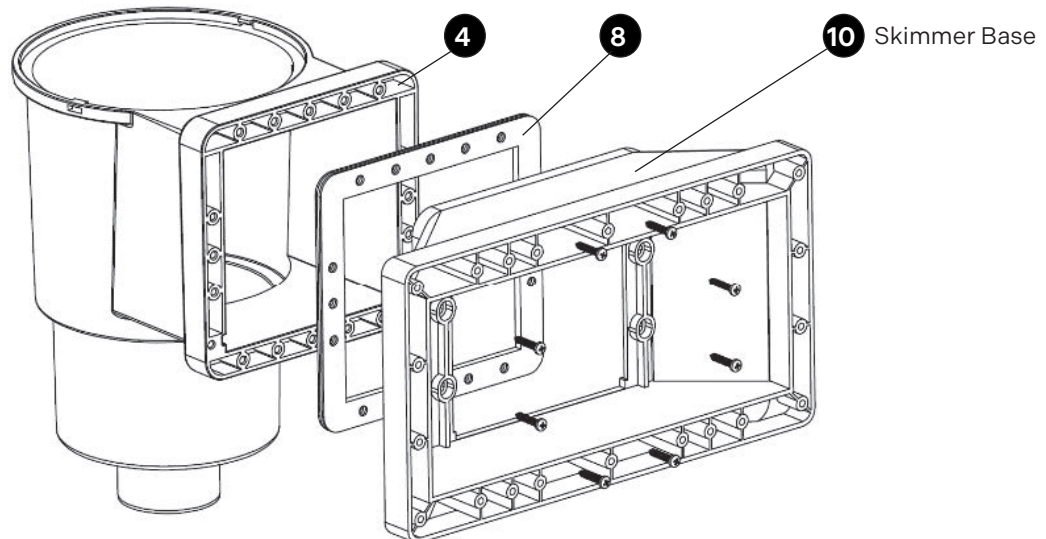

04. Place the double layers rectangle gasket at the opening of the pool wall. The holes position of the rectangle gasket has to be aligned with the hole positions of the pool wall.


05. Attach the skimmer body to the double layers rectangle gasket on the outer wall of the pool, and fix the skimmer body with 4 pan head screws.

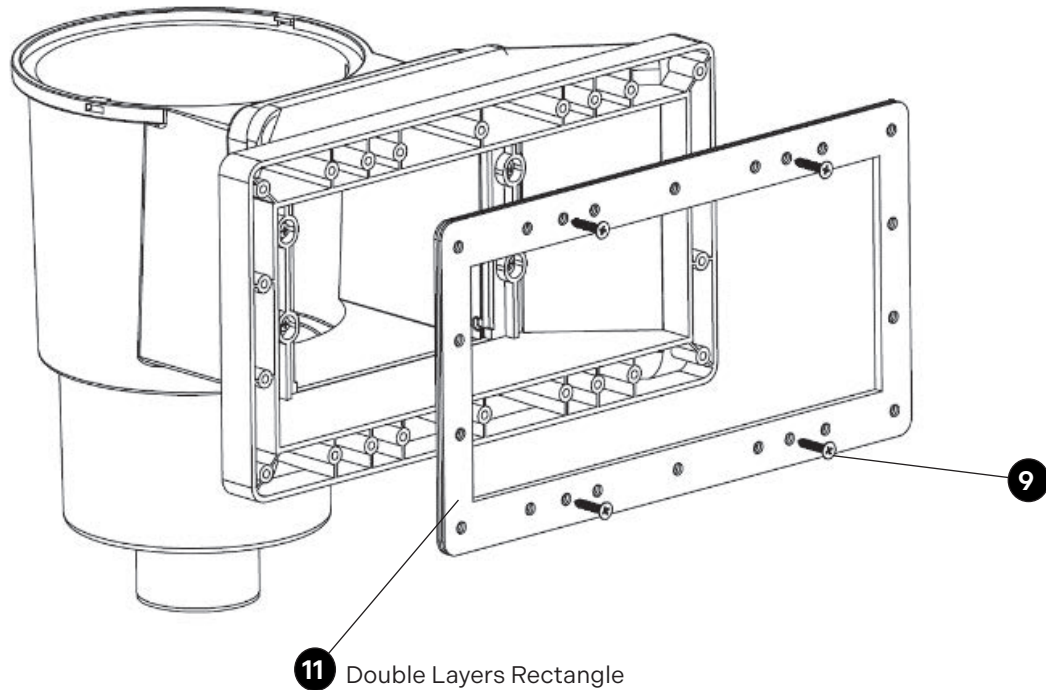

06. Attach the rectangle plate to the double layers rectangle gasket on the inner wall of the pool, and then screw the countersunk head screw to tighten.


07. Finally, install other accessories like weir\cover\ vac plate.

INSTALLATION CUT VIEW

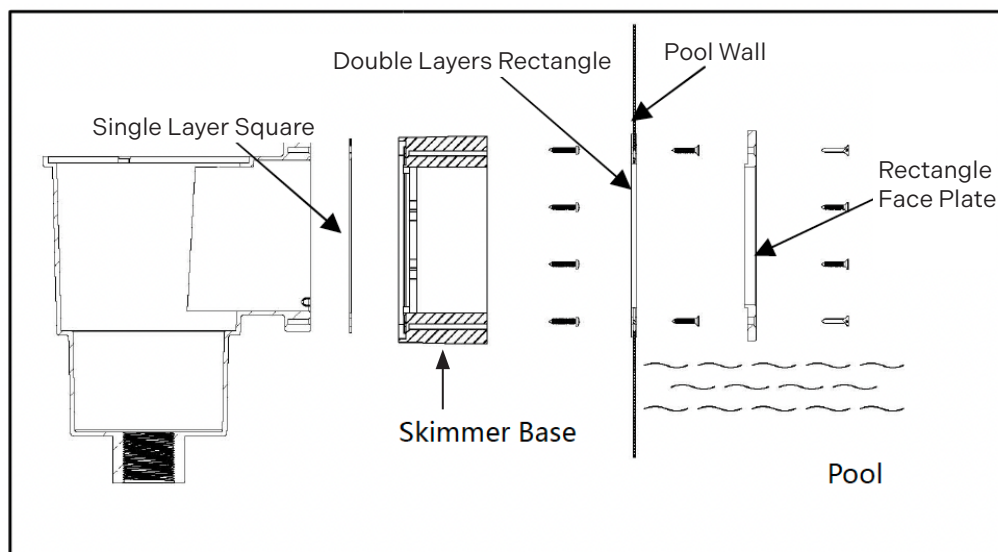


Procedure for Eyeball Parts


01. Cut a round hole in reflow connection position with a hole diameter of 61MM (2.4").
02. First put a round gasket on the ball set bush, then put it into the round hole on the wall of the pool, and the threaded end faces the outer wall.

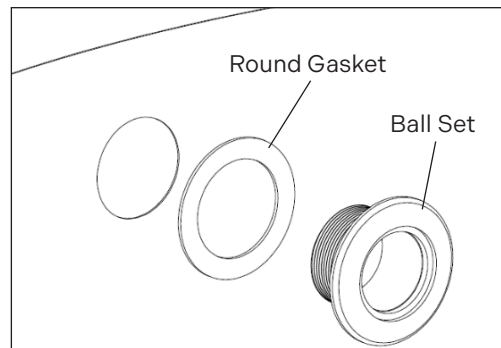


03. At the outer wall of the swimming pool, put the round gasket and paper gasket into the threaded end, tighten with an octagonal nut, and then wrap the raw tape around the joint and screw it into the ball set bush.

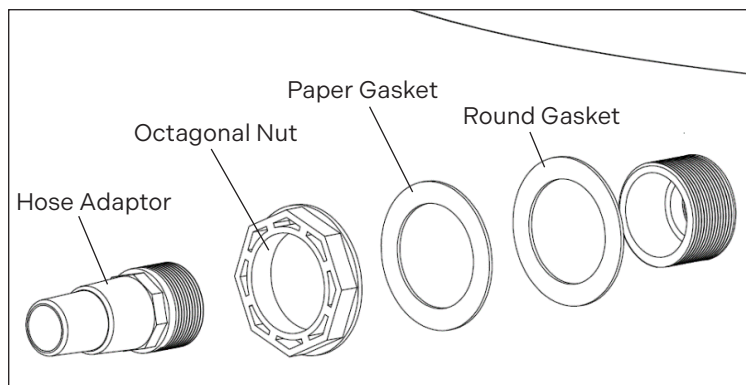

04. At the inner wall of the swimming pool, put the eye ball base and eye ball into the ball set bush, and tighten the eye ball ring.

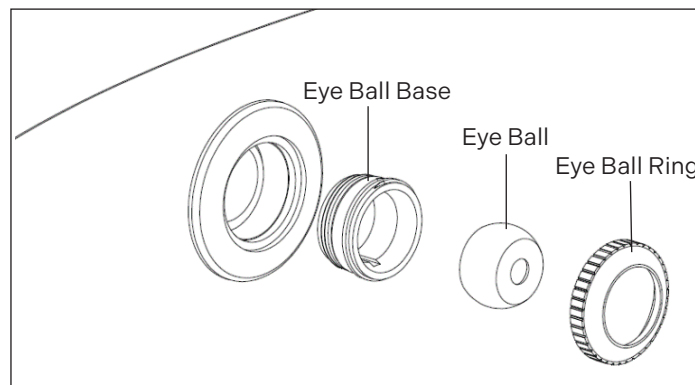

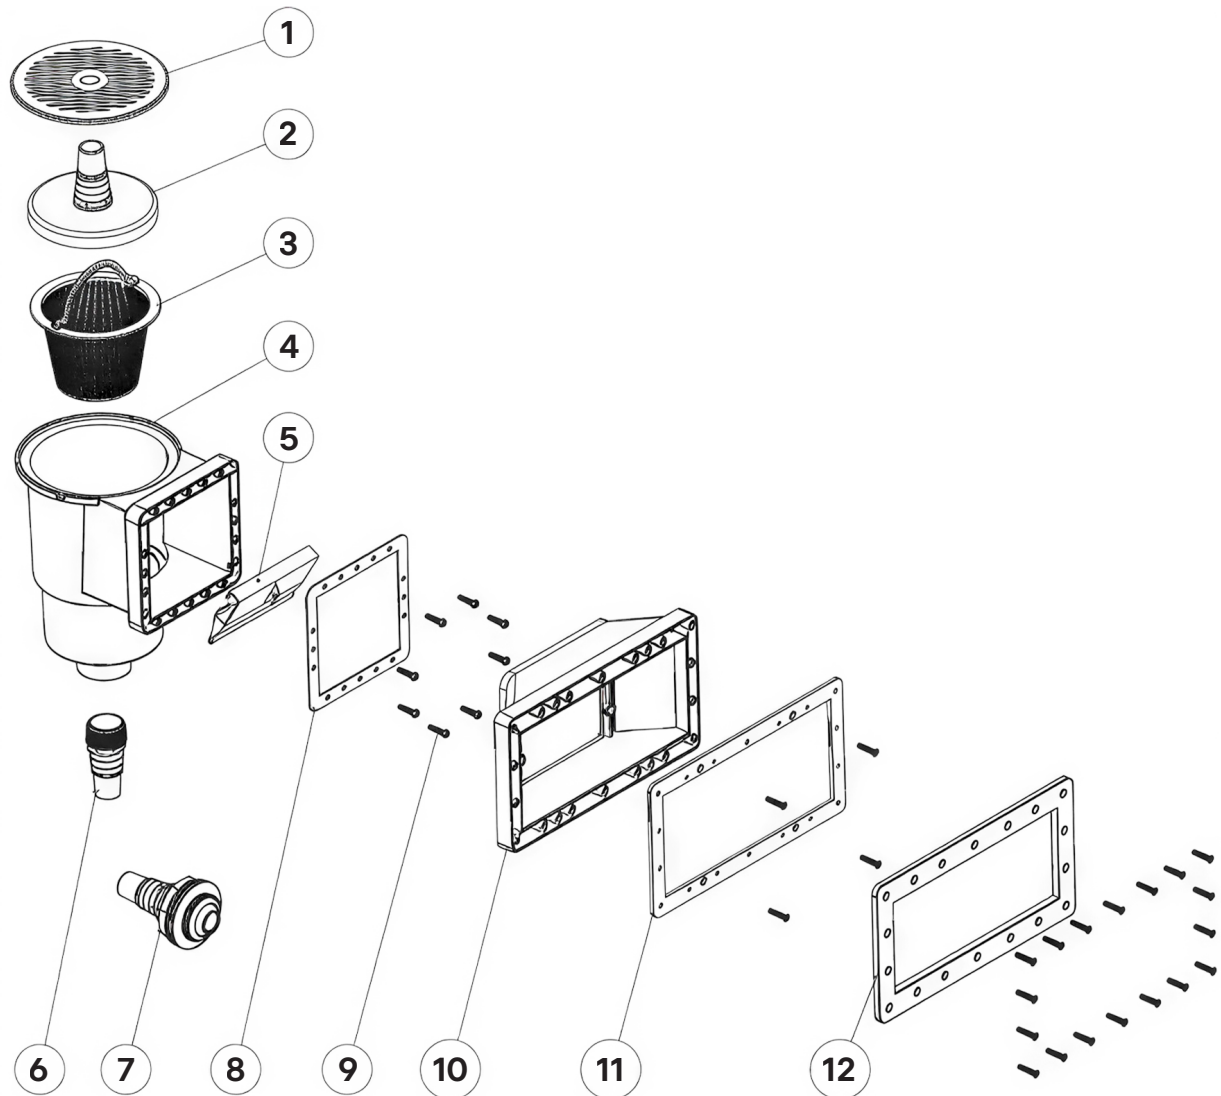

Ref. No.	Part No.	Description	Quantity
1	91015000	Skimmer Cover	1
2	91012000	Suction Plate	1
3	91016000	Skimmer Basket	1
4	49100101001	Main Body	1
5	91017000	Skimmer Weir with Foam	1
6	91011000	Hose Adapter	1
7	91004000	Complete ABS Return Fitting	1
8	91009002	Standard Single-Layer Gaskets	1
9	65862056005	Screw Pack	1
10	49100301001	Skimmer Base	1
11	91018000	Large Double-Layer Gasket	1
12	91006000	Wide-Mouth Faceplate	1

Use only GoPool genuine replacement parts.

GoPool

Need parts or accessories ?
GoPool.com